



MOOSE SPORT®

Moose RubberRoll®



Moose Sports Surfaces, Ltd.
2257 North Wayne Avenue, Suite 2C
Chicago, Illinois 60614

773.477.4664

www.mooseports.com



Moose RubberRoll®

Moose RubberRoll® is a prefabricated 4' wide roll constructed of recycled rubber with EPDM color flecks.

Regularly used in weight rooms, Moose RubberRoll® is also well suited for fitness areas, cardio rooms, spinning rooms and athletic performance training centers.

The many color options available will readily coordinate with color schemes and equipment. Moose RubberRoll® is an economical way to enhance fitness rooms and is durable enough to hold up to high use and heavy weights.

Ideal for Weight Rooms, Fitness Areas and Training Centers




Moose Sports Surfaces, Ltd.
2257 North Wayne Avenue, Suite 2C
Chicago, Illinois 60614

773.477.4664

www.mooseports.com

- 1** Recycled Rubber
- 2** EPDM Rubber Color Flecks
- 3** Adhesive Layer

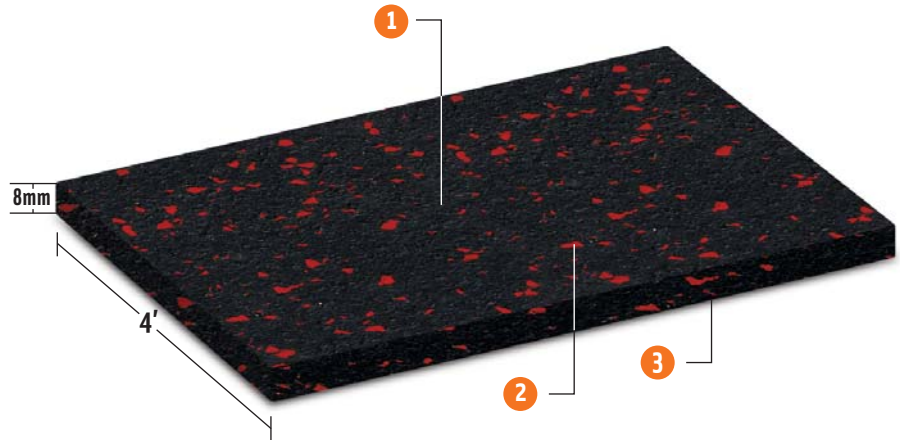


Description:

Moose RubberRoll[®] recycled rubber flooring standard thickness is 8mm. 6mm and 9mm thicknesses are also available with limited color options. Custom thicknesses and custom colors and LOGOS are available upon request.

Technical Data

Tensile Strength lb/in2	ASTM D412	200 minimum
Flexibility, 1/4-inch mandrel	ASTM F137	pass
Static Load, 1000 lb/in2	ASTM F970	less than 0.020 in
Coefficient of Friction	ASTM 2047	greater than 0.9
Chemical Resistance	ASTM F925	
5% Acetic Acid		No Change
70% Isopropyl Alcohol		No Change
5% Sodium Hydroxide		No Change
5% Hydrochloric Acid		No Change
5% Ammonia		No Change
5% Phenol		No Change
Bleach		No Change
Sulfuric Acid		No Change
Ambient Noise Reduction Sabin/ft2	ASTM C423	0.10
Thermal Conductivity BTU-in/hr-ft2-°F	ASTM C518	approximately 0.406
Impact Insulation Class	ASTM E492	45 minimum
Sound Transmission Coefficient	ASTM 413	45 minimum

Standard Colors: *Custom colors & logos available*

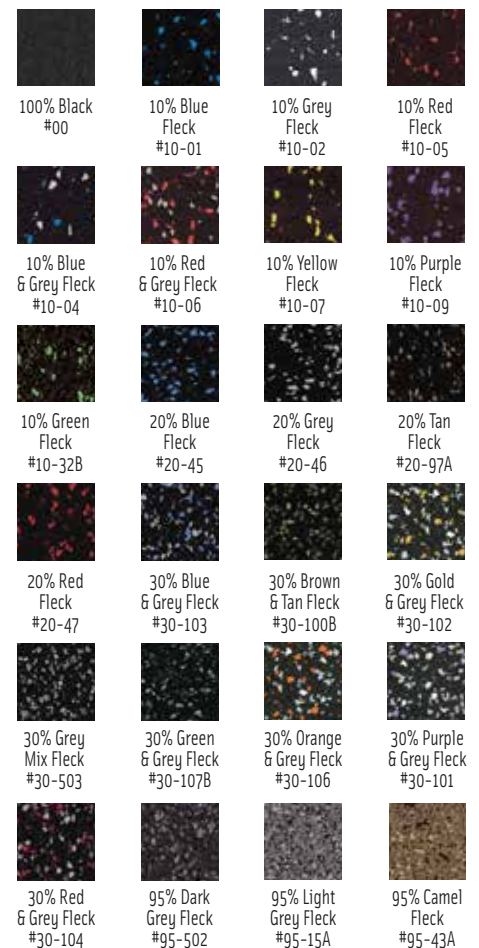

Colors shown are approximations. Contact Moose Sports Surfaces, Ltd. for actual color samples.