



PowerRoll® & PowerTile®



PowerRoll® & PowerTile®


PowerRoll® & PowerTile® are vulcanized rubber sports surfaces designed specifically for school gyms, fitness centers, and strength and conditioning facilities. PowerRoll® & PowerTile® are built to withstand repetitive, heavy-weight impact.

Designed to support athletes, PowerRoll® & PowerTile® deliver consistent shock absorption, optimal traction, abrasion resistance, with unparalleled durability, effective noise reduction, and ease of maintenance.

PowerRoll® & PowerTile® deliver the high performance needed for training and competition by absorbing impact to help keep athletes safe while dampening weight drops for a more focused environment.

Designed for strength and conditioning spaces



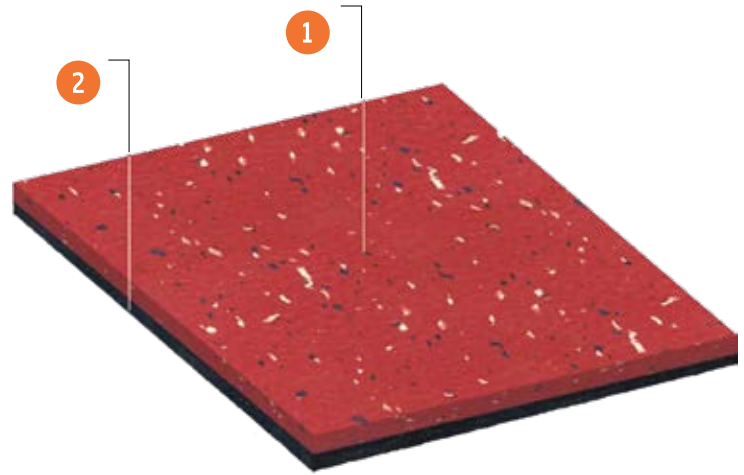

- 1** Heavy Duty Speckled Rubber Surface Layer
- 2** Non-Porous Core Layer

Description:

PowerRoll[®] & PowerTile[®] rubber weight room surface is available in 6mm, 8mm, and 10mm thickness.

PowerRoll[®] is available in 4' wide rolls.

PowerTile[®] is available in 1 meter x 1 meter tiles (3.28' x 3.28').

Technical Data

6mm, 8mm, 10mm

| Technical Data | ASTM | 6mm, 8mm, 10mm |
|---|-------------|---|
| Elongation at Break | ASTM D412 | >220%, >220%, >220% |
| Tensile Strength | ASTM D412 | >350 psi, >350 psi, >350 psi |
| Hardness of Upper Layer | ASTM D2240 | 68±3, 68±3, 68±3 |
| Hardness of Bottom Layer | ASTM D2240 | 66±3, 66±3, 66±3 |
| Abrasion Resistance (H18, 1KG, 1000cycles) | ASTM D3389 | <0.8g, <0.8g, <0.8g |
| Friction | ASTM E303 | >105, >105, >105 |
| Critical Radiant Flux | ASTM E648 | >0.45 Class 1, >0.45 Class 1, >0.45 Class 1 |
| Fungi Resistance | ASTM G21-15 | Level 0, Level 0, Level 0, |
| Resistance of Chemicals | ASTM F925 | No Change, No Change, No Change |
| Resistance of Indentation | EN1516 | <0.3mm, <0.3mm, <0.3mm |
| Resistance to Impact | EN1517 | No Damage, No Damage, No Damage |
| Rolling Load Resistance | EN1569 | Compliant, Compliant, Compliant |
| Color Heat Stability | ASTM F1514 | Compliant, Compliant, Compliant |
| Color Light Stability | ASTM F1515 | Compliant, Compliant, Compliant |
| GREENGUARD Certification | GREENGUARD | Compliant, Compliant, Compliant |
| GREENGUARD Gold | GREENGUARD | Compliant, Compliant, Compliant |
| REACH SVHC Items | REACH | Compliant, Compliant, Compliant |

Standard Colors:



Please refer to the color selection chart for corresponding color numbers.