


MOOSE SPORT[®]
Moose Sports Surfaces, Ltd.
www.MooseSports.com
773-477-4664

SportLastic[®]

Certified
WBENC
Women's Business Enterprise




SportLastic[®]

SportLastic[®] is a vulcanized rubber sport surface recommended for multi-purpose use. It is designed specifically to meet the needs of all types of athletic facilities and sporting activities.


While ideal for multi-purpose applications, this product's special textured surface makes it an outstanding choice for use on tennis courts and running/jogging tracks.

SportLastic[®] is manufactured to exacting specifications and features performance properties including excellent force reduction, slip resistance, friction, shock absorption and durability.

Ideal for tennis, track, and multipurpose gyms.

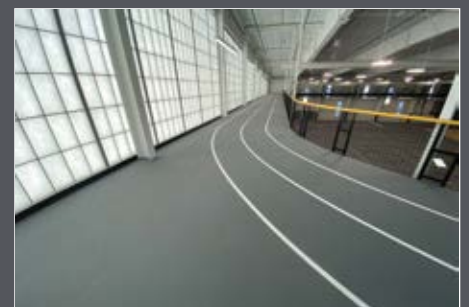

- 1** Durable Pure Rubber Texture Layer
- 2** Compaction Resistant Core Layer
- 3** Shock Absorbing Base Layer

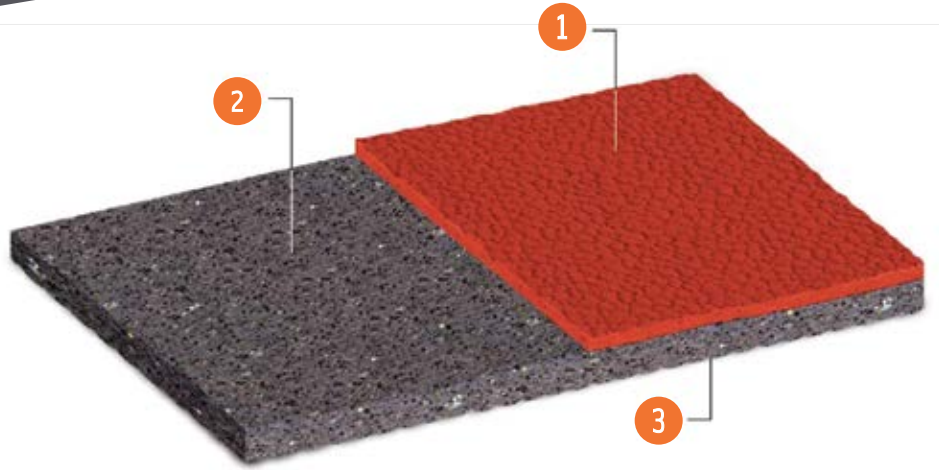

Description:

SportLastic multisport surface is available in 6mm, 8mm & 10mm thicknesses

Technical Data

		6mm, 8mm, 10mm
Elongation at Break	ASTM D412	≥200%, ≥200%, ≥200%
Tensile Strength	ASTM D412	≥210psi, ≥210psi, ≥210psi
Hardness of Wear Layer	ASTM D2240	58±5, 58±5, 58±5
Hardness of Backing	ASTM D2240	38±5, 38±5, 38±5
Abrasion Resistance (H18,1KG, 1000cycles)	ASTM D3389	≤1g, ≤1g, ≤1g
Resistance of Chemicals	ASTM F925	Compliant, Compliant, Compliant
Color Heat Stability	ASTM F1514	0.37, 0.37, 0.37
Color Light Stability	ASTM F1515	1.57, 1.57, 1.57
Friction (Dry)	ASTM E303	≥90, ≥90, ≥90
Shock Absorption	ASTM F2569	13±3%, 16±3%, 19±3%
Vertical Deformation	ASTM F2157	0.7±0.3mm, 0.8±0.3mm
Ball Rebound	ASTM F2117	96%±3, 96%±3, 96%±3
Critical Radiant Flux	ASTM E648	Compliant, Compliant, Compliant
GREENGUARD Certification	GREENGUARD	Compliant, Compliant, Compliant
GREENGUARD Gold	GREENGUARD	Compliant, Compliant, Compliant
REACH SVHC Items	REACH	Compliant, Compliant, Compliant

Standard Colors:



Please refer to the color selection chart for corresponding color numbers.